

- **Exterior Walls:** Exterior walls should be kept well painted and sealed. Don't place compost or leaf piles against the outside walls. Landscape features should not include soil or other bedding material mounded up against walls.
- **Landscaping:** Keep trees trimmed so that branches are at least 7 feet away from any exterior house surface. This will help prolong the life of your siding and roof and prevent insects from entering your home from the tree. Vines should be kept off all exterior walls, because they can help open cracks in the siding, which allows moisture or insects to enter the house.
- **Irrigation:** Inspect and adjust the spray pattern of the irrigation heads to minimize the water sprayed directly onto the house to avoid excessive water near the foundation.

ACT QUICKLY IF WATER INTRUSION OCCURS

If water intrusion does occur, you can minimize the damage by addressing the problem quickly and thoroughly. If water is flowing into the home from burst piping or damaged appliances, shut off the water supply, typically found outside the house or at the meter. Immediately remove standing water and all moist materials, and consult with a licensed building professional who can determine the extent of the repairs necessary. Water damage left unattended can result in structural failure or, potentially, mold growth.

Should your home become damaged by a catastrophic event such as fire, flood or storm, take appropriate actions to prevent further water damage once it is safe to do so. This may include boarding up damaged windows, covering a damaged roof with plastic sheeting, or removing wet, damaged rugs, carpet, or personal belongings. Fast action on your part will help minimize the time and expense for repairs, resulting in a faster recovery.

For more information about protecting your home from water intrusion, check these sources:

**GLE ASSOCIATES, INC.
ARCHITECTS/ENGINEERS/
ENVIRONMENTAL
CONSULTANTS**

www.gleassociates.com

**THE UNITED STATES
ENVIRONMENTAL
PROTECTION AGENCY**

www.epa.gov

**THE NATIONAL CENTER FOR
ENVIRONMENTAL HEALTH**

www.cdc.gov

**THE NATIONAL ASSOCIATION OF
HOME BUILDERS**

www.toolbase.org

**APA - THE ENGINEERED WOOD
ASSOCIATION**

www.apawood.org




Washington Insurance Council

1904 Third Avenue, Suite 925
Seattle, WA 98101-1123
206-624-3330-PH
206-624-1975-FAX
www.wiconline.org

**INSTITUTE FOR
Business &
Home Safety**

IBHS is an initiative of the insurance industry to reduce deaths, injuries, property damage, economic losses and human suffering caused by natural disasters. Contact IBHS at 1 (866) 657-IBHS (4247) or online at www.ibhs.org

Protect Your Home From Water Damage

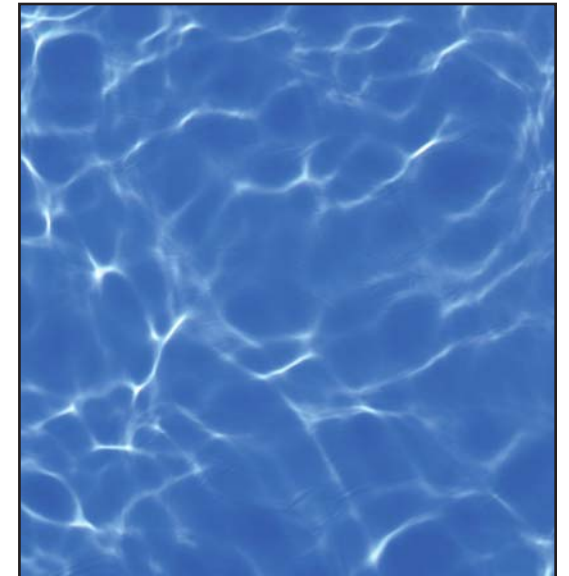

**INSTITUTE FOR
Business &
Home Safety®**

PROTECT YOUR HOME FROM WATER DAMAGE

For people, water is necessary for survival. However, for a house, water can be a destructive force that can lead to wood rot, peeling paint, insect infestation, shorter lifespan of roofing and siding and higher maintenance costs.

INVESTIGATE, IDENTIFY, AND REPAIR ALL LEAKS AND CRACKS

The best way to prevent water damage from rainwater and snowmelt is to ensure the exterior materials of the building are properly constructed and maintained. The following are tips for identifying and eliminating sources of water intrusion in your home.

Common places where water intrusion occurs:

- **Windows and Doors:** Check for leaks around your windows and doors, especially near the corners. Check for peeling paint, it can be a sign of water getting into the wood. Inspect for discolorations in paint or caulking, swelling of the window or doorframe or surrounding materials.
- **Roof:** Repair or replace shingles around any area that allows water to penetrate the roof sheathing. Leaks are particularly common around chimneys, plumbing vents and attic vents. To trace the source of a ceiling leak, measure its location from the nearest outside wall and then locate this point in the attic using a measuring tape. Keep in mind that the water may run along the attic floor, rafters, or truss for quite a

distance before coming through the ceiling.

- **Foundation and Exterior Walls:** Seal any cracks and holes in external walls, joints, and foundations, in particular, examine locations where piping or wiring extends through the outside walls. Fill all cracks in these locations with sealant.
- **Plumbing:** Check for leaking faucets, dripping or “sweating” pipes, clogged drains, and faulty water drainage systems. Inspect washing machine hoses for bulges, cracks or wetness. Replace them every few years or sooner if problems are found. Inspect the water heater for signs of rust or water on the floor.
- **Termite-Damaged Material:** Check for termite damage in wood materials such as walls, beams, or floors. Any wood exposed to the exterior can potentially lead to moisture intrusion or termite infestation.

PREVENT WATER DAMAGE THROUGH GOOD HOME MAINTENANCE

You can help prevent future leaks and water intrusion by regularly inspecting the following elements in your home and making sure they remain in good condition.

- **Flashing:** Flashing, which is typically a thin metal strip found around doors, windows, thresholds, chimneys, and roofs, is designed to prevent water intrusion in spaces where two different building surfaces meet.

- **Vents:** All vents, including clothes dryer, gable vents, attic vents, and exhaust vents, should have hoods, exhaust to the exterior, be in good working order, and have boots.
- **Attics:** Check for holes, air leaks, or bypasses from the house and make sure there is enough insulation to keep house heat from escaping. Among other things, air leaks and inadequate insulation results in ice damming. If ice dams collect around the lower edge of a roof, rain or melted snow can back up under the shingles and into the attic or the house. Check the bottom side of the roof sheathing and roof rafters or truss for water stains.
- **Basements:** Make sure that basement windows and doors have built-up barriers or flood shields. Inspect sump pumps to ensure they work properly. A battery backup system is recommended. The sump pump should discharge as far away from the house as possible.
- **Humidity:** The relative humidity in your home should be between 30% and 50%. Condensation on windows, wet stains on walls and ceilings, and musty smells are signs that you may have too much humidity in your home. Check areas where air does not easily circulate, such as behind curtains, under beds, and in closets for dampness and mildew. Be sure to use bathroom exhaust fans following warm showers or baths. When going on trips, turn the temperature up on the air conditioning, not off. The air conditioning system helps remove moisture from your home. If you are concerned about the

humidity level in your home, consult with a mechanical contractor or air conditioning repair company to determine if your HVAC system is properly sized and in good working order.

- **Air Conditioners:** Check drain pans to insure they drain freely, are adequately sloped toward the outlets and that no standing water is present. Make sure drain lines are clean and clear of obstructions. Drain pan overflows usually occur the first time the unit is turned on in the spring. Clean prior to first use with compressed air or by pouring a water-bleach solution down the drain line until it flows freely.
- **Expansion Joints:** Expansion joints are materials between bricks, pipes, and other building materials that absorb movement. If expansion joints are not in good condition, water intrusion can occur. If there are cracks in the joint sealant, remove the old sealant, install a backer rod and fill with a new sealant.
- **Exterior Wood Sheathing and Siding:** Replace any wood siding and sheathing that appears to have water damage. Inspect any wood sided walls to ensure there is at least 8” between any wood and the earth.
- **Drywall:** Since drywall is an extremely porous material and is difficult to dry out completely, damaged areas should be replaced if any signs of moisture are present. One way to protect drywall from moisture intrusion in the event of a flood is to install it slightly above the floor and cover the gap with molding.